

# VIVREAU®

WITH HOT WATER

## Extra C-Tap 2H Cut Sheet

The most versatile water dispenser on the market. With five water types, it combines functionality with a sleek, modern design.

Project: \_\_\_\_\_

Item#: \_\_\_\_\_

Quantity: \_\_\_\_\_



### Standard features:

- Choice of up to five water types: unchilled and chilled still, chilled semi-sparkling and sparkling – plus hot water on demand
- Vivreau's ThermalGate™ feature protects against retrograde contamination from external sources
- Low energy consumption: features boiler standby/ night modes

### Options & Accessories:

- Easy Access Panel
- Waste water container (if drain pipe is not available)

### Ideal for:

Offices, Executive Lounges, Staff Rooms, Wellness and Spa Areas

### Average output capacity:

Cold water: 85 l/h, 22 gal/h

Hot water: 12 l/h, 3.2 gal/h



AMBIENT



CHILLED  
STILL



SEMI-  
SPARKLING



SPARKLING



HOT

Specifications	
Design	Tap system
Unit dimensions (W X H X D)	16 1/4 x 8 1/4; 2 3/4 inch (H x D; Diameter)
Weight	5.5 lbs (tap)   84 lbs (cooler carbonator)   17.2 lbs (boiler)
Millwork and Ventillation	
Fits into base cabinet with the following dimensions (W X H X D)	30 X 29 1/2 X 24 inch
Tap head clearance	Tap height plus additional 4" clearance for operation
<b>NOTE:</b> Tap must be mounted directly above the main system	
Electrical	
Electrical Requirement	(2) 20amp electrical circuit GFCI recommended (NEMA 5-20R) 120V, 60Hz (11 amps)
CO2	
CO2 Tank (customer supplied)	If connecting to a bulk or existing CO2 system, a CO2 line terminating at a 1/4" barbed shutoff valve must be available within 40" of the System installation site, 100psi minimum pressure.
Plumbing	
Water connection	1 potable 1/2" cold water supply terminating in a 1/2" ball valve with a 1/2" female pipe thread
Waste water connection	Waste water pipe or Waste water container
Drip Tray Drain	Drain to connect 1/2" ID - 3/4" OD drip tray tube
Minimum water pressure	50 PSI
Minimum water flow	80 gallons, 302.8 L per hour
Water conductivity	Water conductivity minimum 100uS/cm at device water inlet
<b>NOTE:</b>	
<ul style="list-style-type: none"> <li>• Any incoming water temperature above 60°F (15.5°C) will severely compromise the ability for the system to maintain a cold water supply.</li> </ul>	

### Consultant specification:


Water Dispensing System, single tap, 13" dispensing height, mains-fed, fully-integrated undercounter cooler/carbonator, 5 water types - ambient, chilled still, medium sparkling, classic sparkling water, hot water. 22.5 gallons/hour cold water output, 3.2 gallons/hour hot water output. Aquastop anti-leak sensor, standard ThermalGate retrograde protection, ETL and NSF certified, natural refrigerant R290, 510W max power consumption (30"W x 30"D x 24"H cabinet space required for installation)



All Vivreau products are Intertek and NSF Certified.






# Extra C-Tap Worktop Cutout

**THIS DRAWING IS NOT TO SCALE**

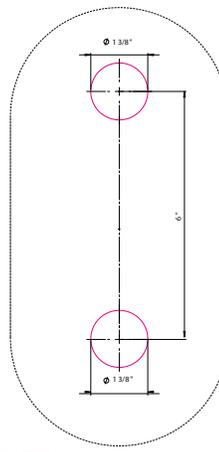


## Approved Methods of Cabinet Ventilation

The cabinet requires **two vents, one for exhaust** and **one for air intake**. The exhaust is on the front of the chiller and comes standard with a shroud that forces the hot air down. If the base cutout is not possible the shroud can be replaced with an optional air guide plate that pushes the air forward requiring a matching cut out in the door. The intake requires a 24 square inch opening to let fresh air in a free and unobstructed area.

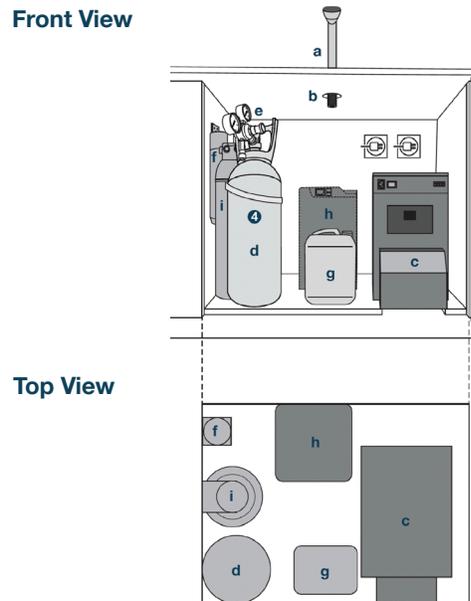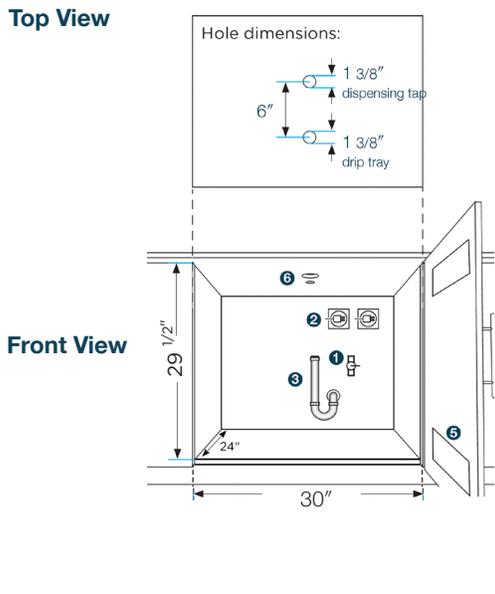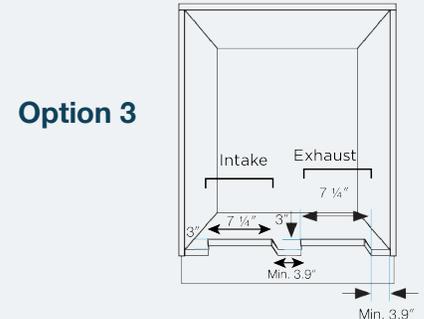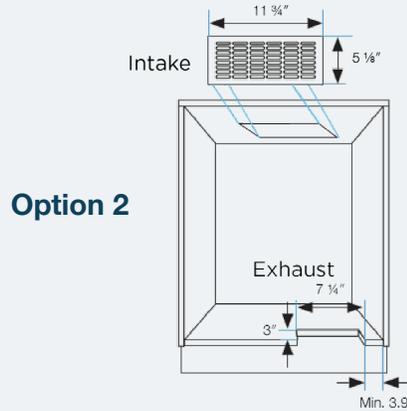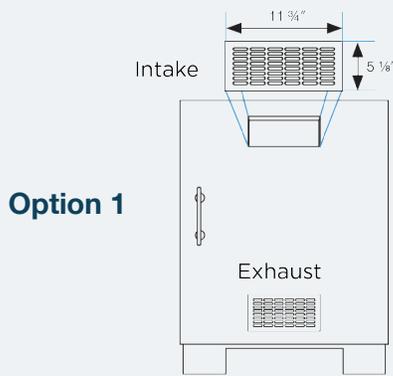


### Drip Tray (integrated)

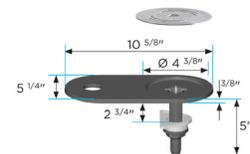

### Cooler-carbonator



### Boiler



- 1 Water Connection
- 2 Electrical Connection
- 3 Waste Water Connection
- 4 CO2 (customer supplied)

- a. Dispensing Tap
- d. CO2 Tank
- h. Boiler
- b. Integrated Trip Tray
- e. CO2 Pressure Regulator
- i. PURITY C Filter
- c. Cooler-Carbonator
- f. Filter
- g. Optional Waste Water Container